

Datasheet MEZ-1


3-Phase, sensor less BLDC Motor Driver

Features

- Input Voltage Range: 2.0 – 5V
- FG Open Drain Output
- PWM Input 15 – 50kHz
- Thermal Shutdown
- Lock Detection
- Manual Speed Control via Potentiometer
- 680mA peak output current
- Chip: Texas Instruments DRV10866

Description

The MEZ-1 is a 3-phase, sensor less BLDC motor driver with drive current capability up to 680mA peak. It is specially designed for long-life, low noise and robust gas pump applications up to 1.5NI/min. It generates a square wave signal.

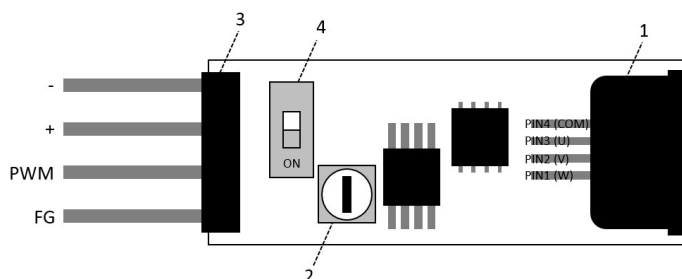


1. Plug for 4-phase flat-flex, ribbon jumper cable
2. Potentiometer (230°)
3. Plug multi-pin connector (male 7.7mm)
4. Dipswitch (1 and 0) factory setting OFF

Pin & Control Configuration


| PIN | | DESCRIPTION |
|------|------|---|
| NAME | NO. | |
| VCC | + | Input voltage for motor and chip-supply voltage; the internal clamping circuit clamps the V _{CC} voltage. |
| FG | FG | Frequency generator output. 4 pulses per revolution for motor X13. In general (FGx60)/pole pairs |
| GND | - | Ground pin. |
| PWM | PWM | PWM input pin. The PWM input signal is converted to a fixed 156-kHz switching frequency on the MOSFET driver. The PWM input signal resolution is less than 1%. This pin can also control the device and put it in or out of standby mode. After the signal at the PWM stays low (up to 500µs), the device goes into low-power standby mode. The rising edge of the PWM signal wakes up the device and puts it into active mode, where it is ready to start to turn the motor. |
| U | PIN1 | Phase U output. |
| V | PIN2 | Phase V output. |
| W | PIN3 | Phase W output. |
| COM | PIN4 | Motor common terminal input |

Dipswitch OFF / ON




OFF – PWM-Control

Speed is controlled by PWM input. PWM input works with 15 - 50kHz. 20kHz is recommended.




PWM not connected results in 100% speed.
100% speed is dependent on motor and load.
0% (low level) for more than 500µs triggers standby mode.



ON – Potentiometer-Control

Best manipulated by slit slot screw driver
Potentiometer with mechanical stop:

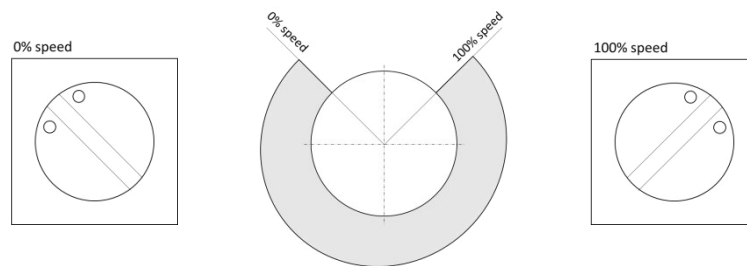


Electric Specification


| PARAMETER | TEST COND. | MIN | NORM | MAX | UNIT |
|--------------------------|--------------------------|-----------------------------------|-----------------|----------------------|------|
| SUPPLY VOLTAGE | | | | | |
| V _{CC} | Supply Voltage | 2 | 3.3 | 5.5 | V |
| SUPPLY CURRENT | | | | | |
| I _{VCC-Standby} | Standby current | V _{CC} = 3.3V | | 2 | mA |
| | Current limit | 680 | 800 | 920 | mA |
| PWM | | | | | |
| V _{PWM-IH} | High-level input voltage | V _{CC} -0.3 | | V _{CC} +0.3 | V |
| V _{PWM-IL} | Low-level input voltage | V _{CC} ≥ 4.5V | | 0.8 | V |
| F _{PWM} | PWM input frequency | 15 | | 50 | kHz |
| I _{PWM-Source} | | Active mode, V _{CC} = 5V | | 100 | µA |
| T _{STBY} | | PWM = 0 | | 500 | µs |
| TEMPERATUR | | | | | |
| T _J | Oper. junction temp. | -40 | | 125 | °C |
| FG | | | | | |
| V _{FG-OH} | High-level | V _{CC} - 0.3 | V _{CC} | V _{CC} +0.3 | V |
| V _{FG-OL} | Low-level | | | 0.3 | V |
| I _{FG-Sink} | FS pin sink current | V _{FG} = 0.3V | | 5 | mA |

Mechanical Specification


Motor plug:

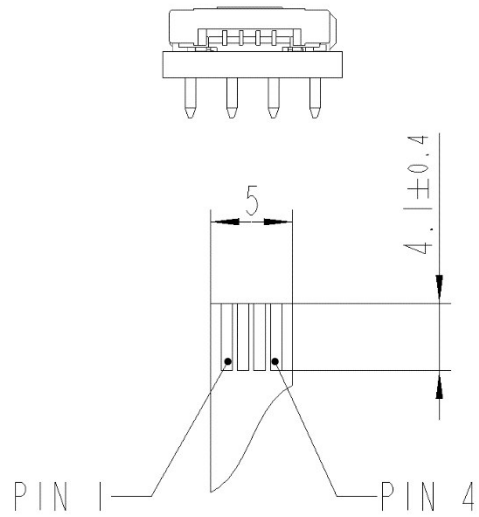


Device plug:

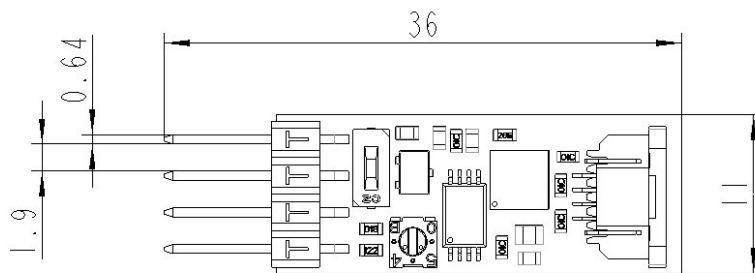

MEZ-1:

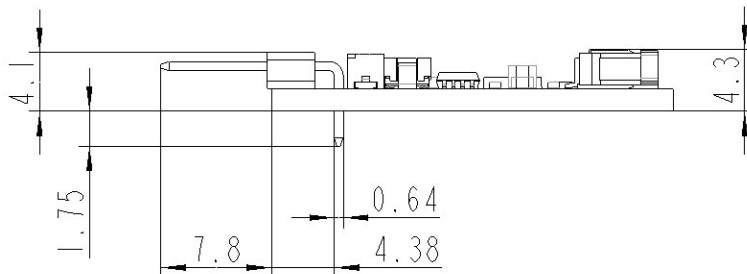

MEZ-1 with adapter cable (included in scope of supply) :

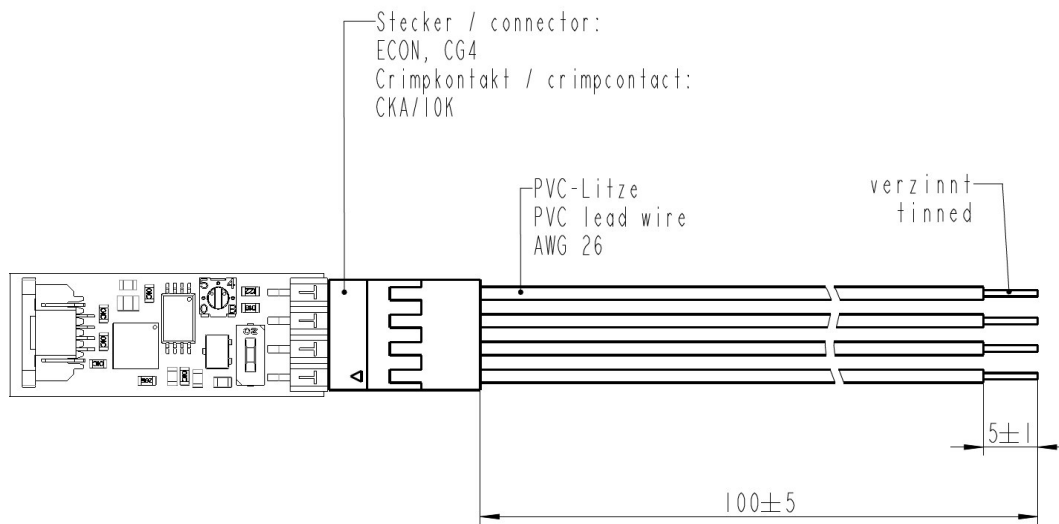

Norms

- Compliant with 2011/65/EU (RoHS2)
- No EMC compliance tested and therefore provided

YOUR LOCAL PARTNER AROUND THE WORLD

KNF SALES ORGANIZATION

Australia KNF Regional Office
Moreland West VIC 3055
Tel. +61 3 9386 4959
info@knf.com.au
www.knf.com.au

Benelux Netherlands KNF Verder B.V.
3451 GG Vleuten
Tel. +31 30 677 92 40
info@knf-verder.nl
www.knf-verder.nl

Benelux Belgium and Luxemburg
KNF Verder N.V.
2630 Aartselaar
Tel. +32 3 871 96 24
info@knf.be
www.knf.be

China KNF Technology (Shanghai) Co., Ltd.
Shanghai 201203
Tel. +86 21 5109 9695
info@knf.com.cn
www.knf.com.cn

France KNF Neuberger SAS
68128 Village-Neuf
Tel. +33 389 70 35 00
info@knf.fr
www.knf.fr

Germany KNF Neuberger GmbH
79112 Freiburg
Tel. +49 7664 5909 0
info@knf.de
www.knf.de

India KNF Pumps + Systems (India) Pvt. Ltd.
Hinjewadi Pune 411 057
Tel. +91 20 640 13 923
info@knfpumps.in
www.knfpumps.in

Italy KNF Italia S.r.l.
20063 Cernusco s. Naviglio (MI)
Tel. +39 02 929 04 91
info@knf.it
www.knf.it

Japan KNF Japan Co. Ltd.
Tokyo 104-0033
Tel. +81 3 3551 7931
info@knf.co.jp
www.knf.co.jp

Korea KNF Neuberger Ltd.
135-502 Seoul
Tel. +82 2 959 0255
knf@knfkorea.com
www.knfkorea.com

Latin America KNF Regional Office
Tel. +1 609 649 1010
gb@knf.com
www.knf.com/es

Morocco, Tunisia, Algeria
KNF Neuberger SAS
68128 Village-Neuf
Tel. +33 389 70 35 00
info@knf.fr
www.knf.fr

Singapore KNF Regional Office
Tel. +65 9722 1994
info@knf.com.sg
www.knf.com.sg

Sweden, Finland, Denmark, Norway
KNF Neuberger AB
117 43 Stockholm
Tel. +46 8 744 51 13
info@knf.se
www.knf.se

Switzerland KNF Neuberger AG
8362 Balzerswil
Tel. +41 71 973 99 30
knf@knf.ch
www.knf.ch

UK, Ireland KNF Neuberger U.K., Ltd.
Witney, Oxfordshire OX28 4FA
Tel. +44 1993 77 83 73
info@knf.co.uk
www.knf.co.uk

USA, Canada KNF Neuberger, Inc.
Trenton, NJ 08691-1810
Tel. +1 609 890 8600
knfusa@knf.com
www.knfusa.com

KNF PRODUCT CENTERS

Gas Pumps KNF Neuberger GmbH
DE-79112 Freiburg
info@knf.de
www.knf.de

Micro Gas Pumps KNF Micro AG
CH-6260 Reiden
info@knf-micro.ch
www.knf-micro.ch

Liquid Pumps KNF Flodos AG
CH-6210 Sursee
info@knf-flodos.ch
www.knf-flodos.ch