




Diaphragm Pumps for Air, Gases and Vapours

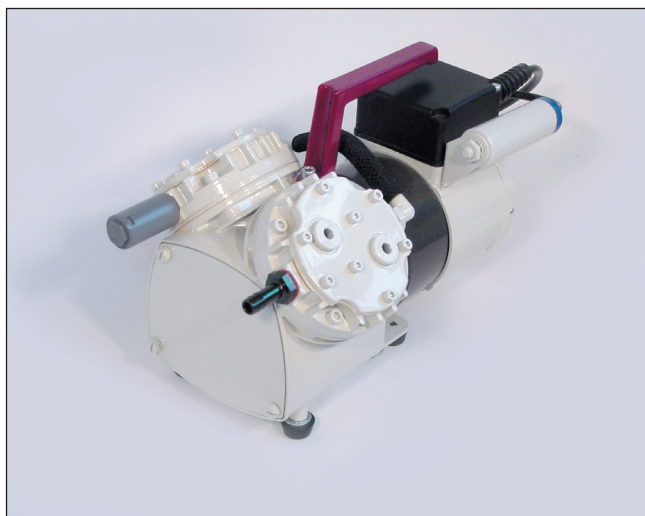

Diaphragm Vacuum Pumps

Technical features:

- 100% oil-free transfer
- Pure transferring and evacuation of gases
- Version for slightly aggressive or corrosive gases and vapours
- Maintenance-free
- Environmentally friendly
- Gastight, leakage rate approx. 6×10^{-3} mbar x l/s, not tested in serial production

Series N 026.3 A_.18 Pumps

Series N 026.3 diaphragm pumps are double-head, dry-running devices used in a wide range of laboratory applications. They transfer and pump down without contamination. The pumps are available in various versions differing in the materials which contact the media.

Technical data:	N 026.3 AN.18	N 026.3 AT.18
Delivery (l/min) ¹⁾	22	18
Ultimate vacuum (mbar abs.)	20	25
Operating pressure (bar g)	-	-
Connectors for tube (mm)	ID 9	ID 9
Permissible gas and ambient temperature	+5...+40 °C	+5...+40 °C
Mains	230V/50Hz	230V/50Hz
Motor protection	IP 20	IP 20
Power P ₁	170 W	170 W
Operating current	0.85 A	0.85 A
Weight	5.8 kg	5.8 kg
Dimensions L x H x W (mm)	243/192/185	243/192/185
With thermal switch		

Material in contact with the pumped media

Type/Order No.	Pump head	Diaphragm	Valves
N 026.3 AN.18	Aluminum	CR	Stainless steel
N 026.3 AT.18	Aluminum	PTFE-coated	Stainless steel

Motors with other voltages and frequencies on request.

¹⁾ at atm. pressure

Accessories


Description	Details	for Type	Order No.
Silencer/Filter	G 1/4		000352
Fine control valve with vacuum gauge	suction side	N 026.3 AN.18	011868




Diaphragm Pumps for Air, Gases and Vapours

Dimensions and performance characteristics

Pump down time for 20 l receiver

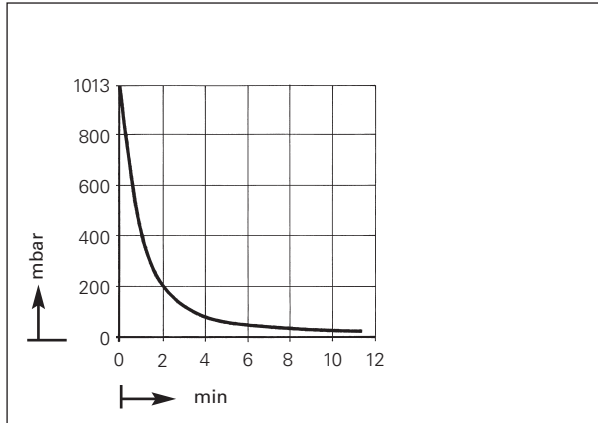

Performance characteristics

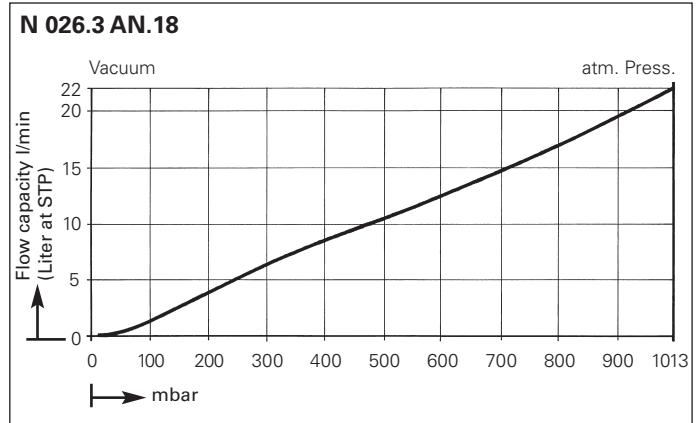

Dimensions (mm)

