

N 024 SERIES | TEMPERATURE-RESISTANT AND HEATED GAS SAMPLING PUMPS




N 024 ST.11 E

ADVANTAGES

- Temperature-resistant (.16) or electrically heated with thermostatic temperature control (.11) for transferring hot process gases of up to 240 °C
- High chemical resistance
- Homogeneous temperature distribution throughout the entire pump head
- No condensation in the pump head

POSSIBLE AREAS OF USE

- Environmental monitoring – especially motor test benches in automobile industry
- Analytical technology
- Research



Please visit our website
www.knf.com
 to get more information

PERFORMANCE DATA

Series model	N 024		
Material design	AT.16 E	ST.16 E	ST.11 E
Pump head	Aluminum	Stainless steel	
Diaphragm	PTFE		
Valves	PTFE		
Flow rate at atm. pressure (l/min)	18.0		
Ultimate vacuum (mbar abs.)	200		
Max. operating pressure (bar rel./psig)	1.5/21.8		
Permissible ambient temperature (°C)	+5 ... +40		
Permissible media temperature (°C)	+5 ... +240		
Weight (kg/lbs)	6.1/13.4	7.3/16.1	

ELECTRICAL DATA

Voltage (V)	230
Motor	Capacitor motor
Protection class motor	IP 54
Frequency (Hz)	50
Power P ₁ (W)	100
I _{max} (A)	0.60


N 024 AT.16 E | ST.16 E

PERFORMANCE DATA


Series model	Flow rate at atm. pressure (l/min) ¹⁾	Max. operating pressure (bar rel./psig)	Ultimate vacuum (mbar abs.)
N 024 AT.16 E	18.0	1.5/21.8	200
N 024 ST.16 E	18.0	1.5/21.8	200

¹⁾Flow rate determined at 20 °C, 1013 mbar abs.
(Pressure 0 to 1013 mbar abs. in accordance with ISO 21360-1/2)

N 024 _T.16 E

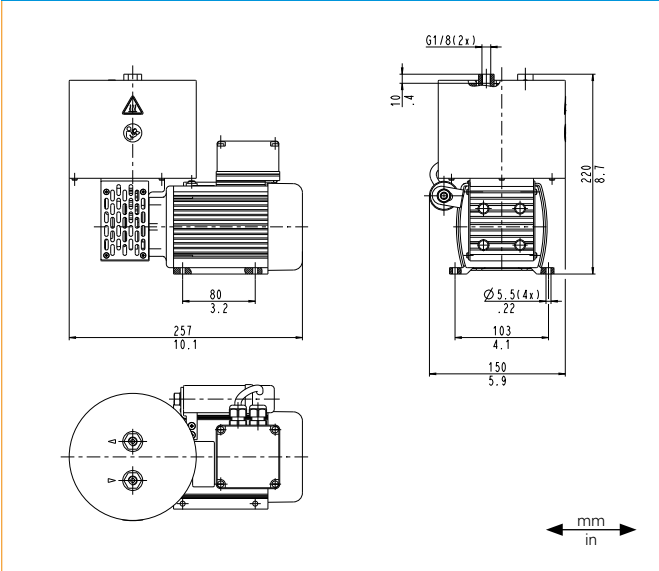

N 024 _T.16 E

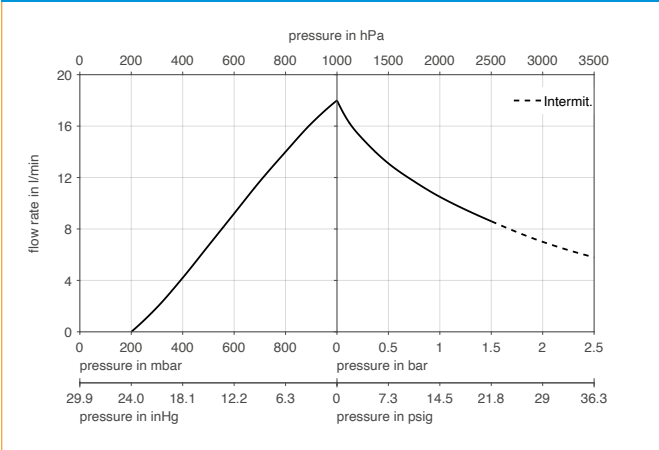

N 024 ST.11 E

PERFORMANCE DATA


Series model	Flow rate at atm. pressure (l/min) ¹⁾	Max. operating pressure (bar rel./psig)	Ultimate vacuum (mbar abs.)
N 024 ST.11 E	18.0	1.5/21.8	200

¹⁾Flow rate determined at 20 °C, 1013 mbar abs.
(Pressure 0 to 1013 mbar abs. in accordance with ISO 21360-1/2)


HEATING: N 024 ST.11 E

Protection class	IP 20
Voltage/Frequencies (V/Hz)	230/50
Power P ₁ (W)	250
I _{max} (A)	1.20
Heating temperature (°C)	240





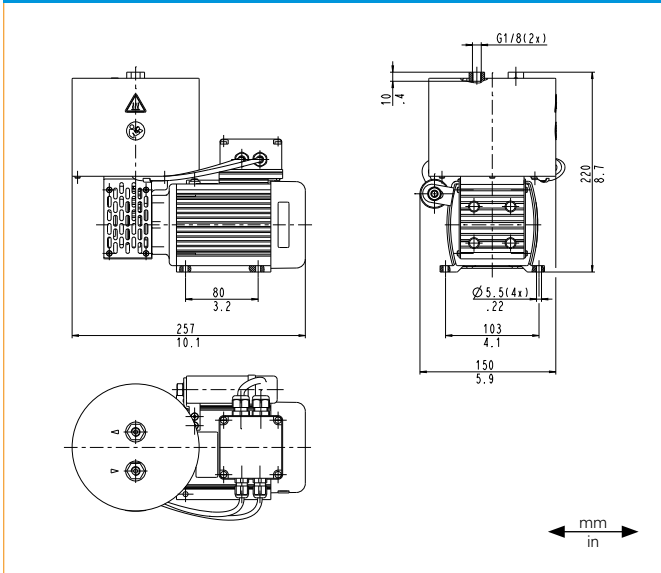

N 024 ST.11 E

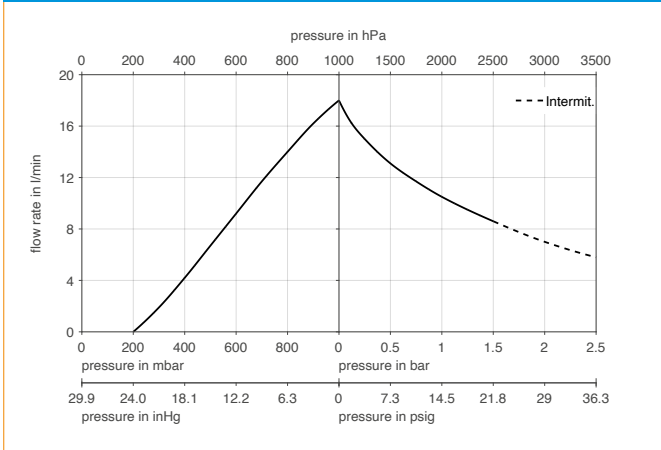

N 024 ST.11 E



OPTIONS

Description	Illustration	Details
Rotated pump housing		<p>The pump housing may be rotated by 180° at the factory. Any condensate will drain from the pump head, which improves the function of the pump when operating with high condensate concentrations.</p>
Customized head connectors		<p>The height of the remote pump head can be adapted to the customer's system according to the project. NPT1/8" threaded connections and various fittings are optional.</p>
Flanged version		<p>This configuration has been designed for installation on a heated analyzer cabinet. The pump is mounted by a flange on the outside of the cabinet housing. The pump head then protrudes into the hot area. The area between the pump head and the compressor housing can be insulated.</p>
Brushless DC motor		<p>Controllable, brushless DC motors are available as an option. They can be used for the dynamic adjustment of pumping capacity to the customer's system and for the custom-fit calibration of the pumping capacity.</p>
Heated variant (.11)		<p>The pump head is pre-heated to ca. 240 °C using a heating cartridge and a thermostat.</p>
ATEX		<p>Pumps for ATEX zones are available on request.</p>

ACCESSORIES

Description	Illustration	Part No.
Wrench for retainer plate		018812

SPARE PARTS

Description	Illustration	Part No.	Details
Spare parts kit N 024		032524	Spare parts kit consists of: 1x diaphragm (3-fold), 2x valve spring, 2x O-rings, 24x disk spring. This set is required to maintain the pump.

The performance values for the series models shown on this data sheet were determined under test conditions. The actual performance values may differ and depend in particular on the usage conditions and therefore on the specific application, on the parameters of the components involved in the user's system and on any technical modifications carried out which deviate from the standard configuration or the as delivered condition.

If individual designs have been created for specific customers on the basis of series models, other technical performance data may apply. Before operation begins, the relevant operating instructions and/or assembly or installation instructions should be read and the safety information contained in these instructions should be noted. KNF reserves the right to make changes to the product and the associated documentation without prior notice to the customer.



www.knf.com