

# N 026 SERIES

## EXPLOSION PROOF PUMPS




### ADVANTAGES

- High chemical resistance
- Durable even with difficult operating conditions
- High level of gas tightness: approx.  $6 \times 10^{-3}$  mbar x l/s

### POSSIBLE AREAS OF USE

- Environmental monitoring – especially in potentially explosive fields
- Process industry
- Chemical industry

Please visit our website  
[www.knf.com](http://www.knf.com)  
 to get more information

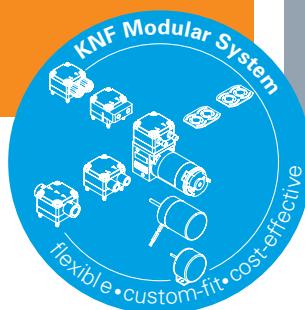

### PERFORMANCE DATA

Series model	N 026		N 026.1.2	
Material design	AT.9 E Ex	ST.9 E Ex	AT.9 E Ex	ST.9 E Ex
Pump head	Aluminum	Stainless steel	Aluminum	Stainless steel
Diaphragm	PTFE-coated			
Valves	Stainless steel			
Flow rate at atm. pressure (l/min)	15.0		26.0	
Ultimate vacuum (mbar abs.)	100			
Max. operating pressure (bar rel./psig)	2.5/36.3		2.0/29.0	
Permissible ambient temperature (°C)	+5 ... +40			
Permissible media temperature (°C)	+5 ... +40			
Weight (kg/lbs)	7.6/16.7	8.9/19.6	9.3/20.5	11.4/25.1

### ELECTRICAL DATA

Voltage (V)	230	230/400	230	230/400	230	230/400	230	230/400
Motor	Capacitor motor	Three-phase motor	Capacitor motor	Three-phase motor	Capacitor motor	Three-phase motor	Capacitor motor	Three-phase motor
Protection class motor	IP 44							
Frequency (Hz)	50							
Power P <sub>1</sub> (W)	70.0							
I <sub>max</sub> (A)	0.96	0.50/0.29	0.96	0.50/0.29	0.96	0.50/0.29	0.96	0.50/0.29
Explosion protection pump parts	Ex II 2G Ex h IIB+H2 T4 Gb							
Explosion protection capacitor motor	Ex II 2G Ex eb IIC-T3 Gb							
Explosion protection three-phase motor	Ex II 2G Ex eb IIC-T4 Gb							




# N 026 AT.9 E EX | ST.9 E EX

## PERFORMANCE DATA

Series model	Flow rate at atm. pressure (l/min) <sup>1)</sup>	Max. operating pressure (bar rel./psig)	Ultimate vacuum (mbar abs.)
N 026 AT.9 E Ex	15.0	2.5/36.3	100
N 026 ST.9 E Ex	15.0	2.5/36.3	100


<sup>1)</sup> Liter at STP

## N 026\_T.9 E EX

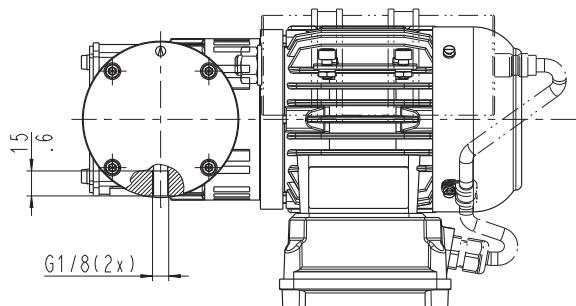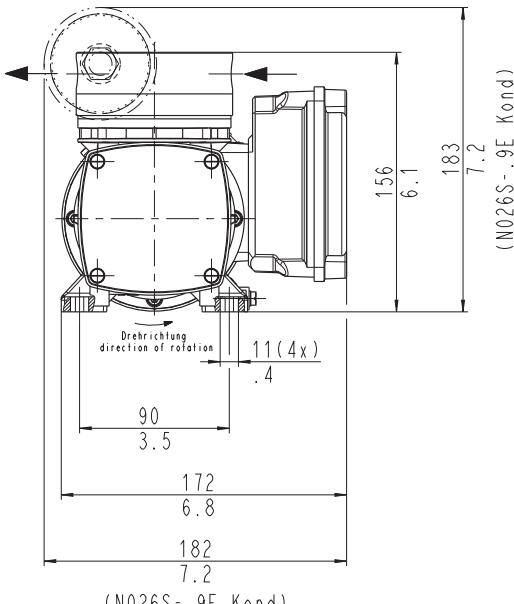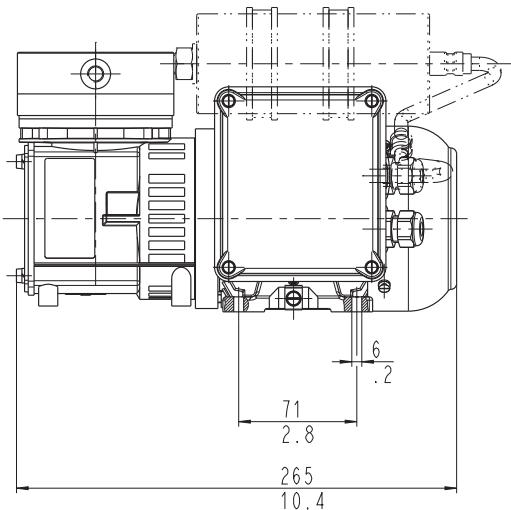

mm  
in

## N 026\_T.9 E EX

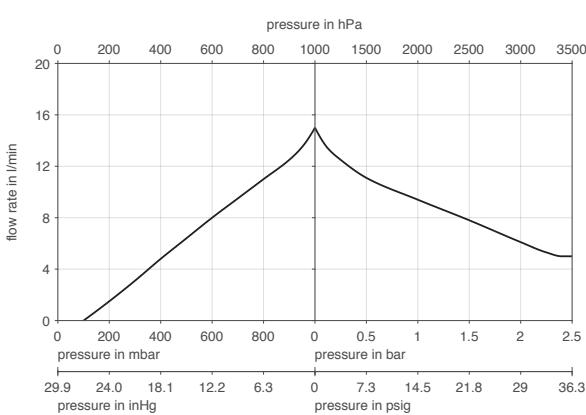



# N 026.1.2 AT.9 E EX | ST.9 E EX

## PERFORMANCE DATA

Series model	Flow rate at atm. pressure (l/min) <sup>1)</sup>	Max. operating pressure (bar rel./psig)	Ultimate vacuum (mbar abs.)
N 026.1.2 AT.9 E Ex	26.0	2.0/29.0	100
N 026.1.2 ST.9 E Ex	26.0	2.0/29.0	100


<sup>1)</sup> Liter at STP

## N 026.1.2 \_T.9 E EX

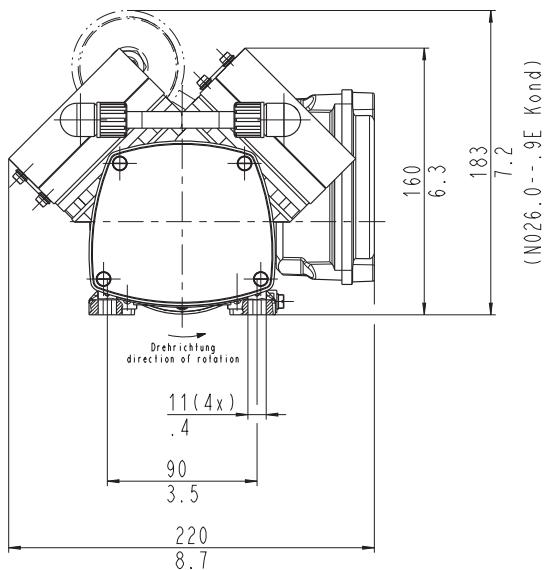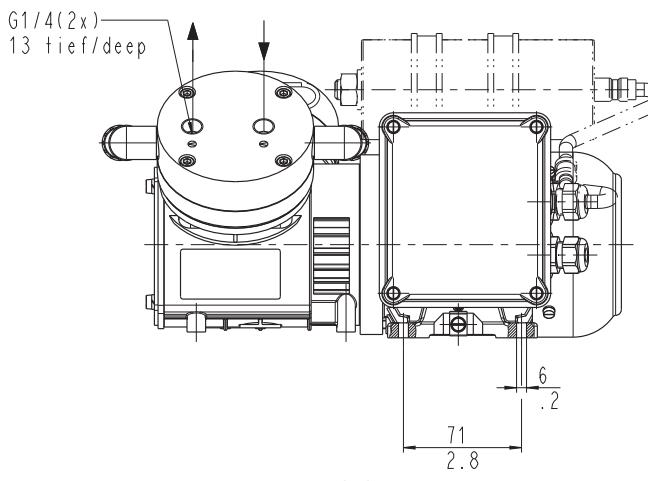

mm  
in

## N 026.1.2 \_T.9 E EX

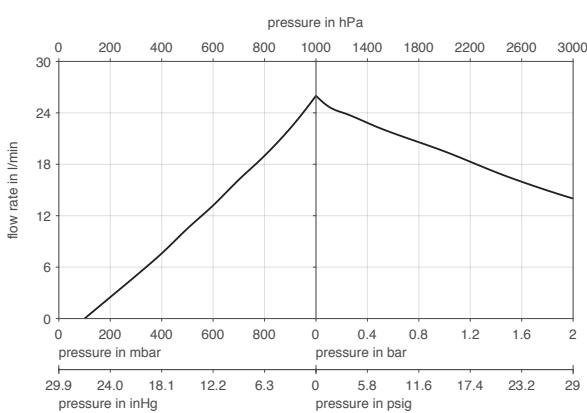

The performance values for the series models shown on this data sheet were determined under test conditions. The actual performance values may differ and depend in particular on the usage conditions and therefore on the specific application, on the parameters of the components involved in the user's system and on any technical modifications carried out which deviate from the standard configuration or the as delivered condition.

If individual designs have been created for specific customers on the basis of series models, other technical performance data may apply.

Before operation begins, the relevant operating instructions and/or assembly or installation instructions should be read and the safety information contained in these instructions should be noted.

KNF reserves the right to make changes to the product and the associated documentation without prior notice to the customer.



[www.knf.com](http://www.knf.com)